


Manufactured specifically to meet **North American Standard Dire Hose** Standard thread. It Has a non-rising brass stem with easy open and close. Valve also includes a tapered gate sealing feature inside to ensure a complete seal.

Canada Valve and Fittings, HGV250 series **300 PSI** rated gate valves are ideal for fire hydrant, hose testing, standpipes, and pumps. HGV250 series valves are excellent shut off valves that offers high flow with it's fully 2.5" open waterway and control water hammer and reduce hydrant main damage.

CAN-VAL-FIT stocks all Canadian Provincial Fire Threads. Standard threads include **BAT, WCT, CSA, QST, NSZ1, NPSH, NPT.**

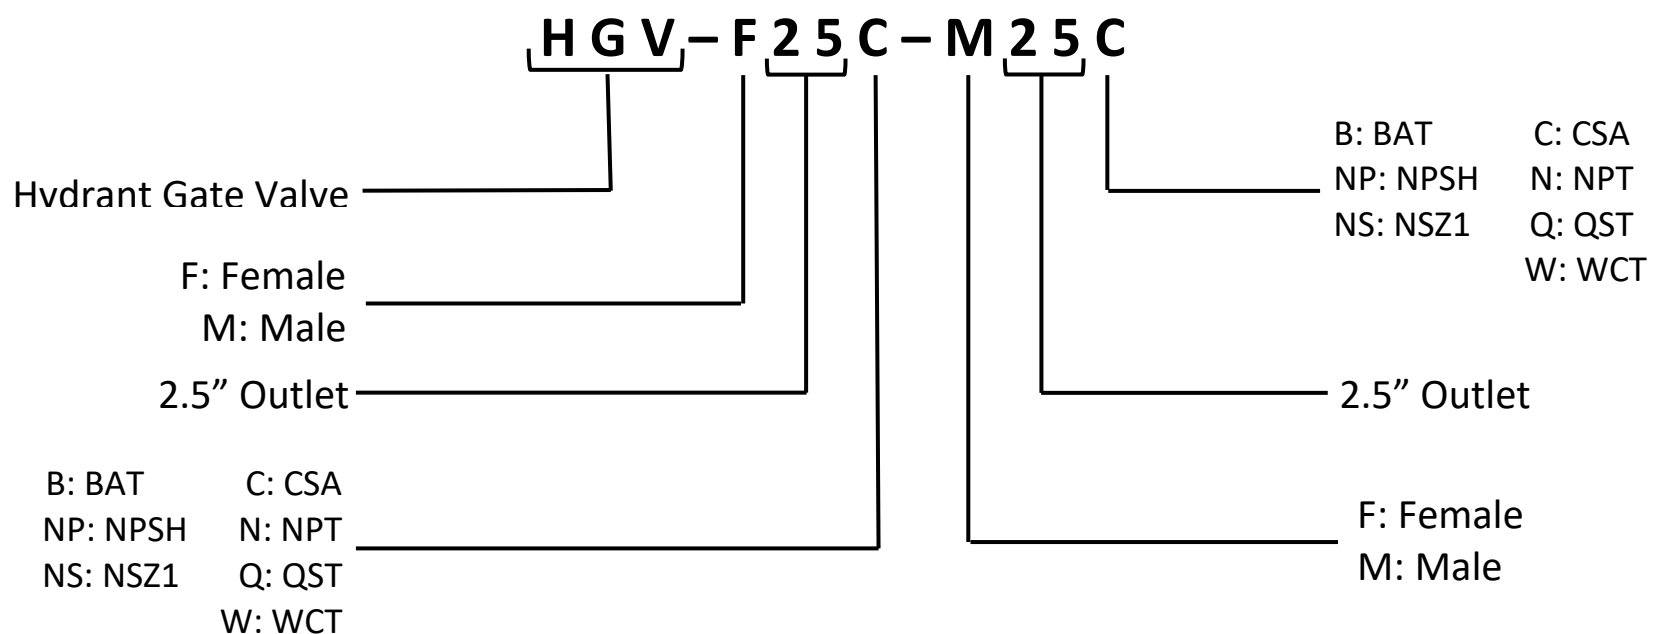

TECHNICAL SPECIFICATION

PRESSURE RATINGS:

300 psi Test Pressure
180 psi Working Pressure

LENGTH: 4.5"

WIDTH: 4.0"

WATERWAY: Full 2½" Waterway

HEIGHT: 9.5"

MATERIAL: Cast Iron body with Brass Stem

WEIGHT: 9.0 lbs

FINISH: Powder coded red body